VapourFlow

META B PIV solo

Auto intake Warm AirVent

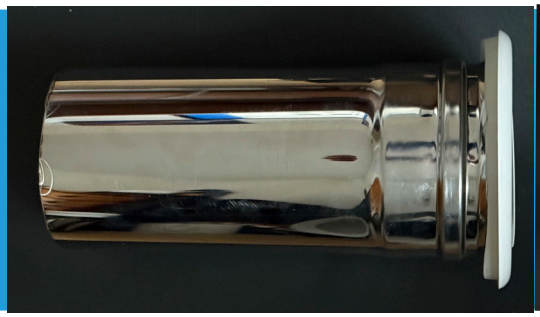

ABOUT The META PIV

Achieve superior air exchange and humidity control with the META B PIV. When installed in tandem with the META Dryvent, these units create a dynamic cross-ventilation system, effectively removing dampness from any space. Flexible installation and adaptable settings make it the perfect solution for comprehensive moisture management."

How it Works

The META B PIV brings fresh, filtered air into the building, using Far Infrared technology to warm the air when it is cold outside. For moisture control this unit must be paired with the META Dryvent

Location

Basement, or Any location around the home, installed with ducting and filter grille.

Cross Flow Ventilation

The unit should be paired with the META Dryvent positioned in the other wet room , if the META B PIV is in the Attic, Basement or hallway, then the META Dryvent would be in the Bathroom, other side of the basement or the kitchen.

META Range

META fans are available in the sub surface versions for more flexible installation solutions.

Features

Discover the META PIV, is a well tried ventilation solution. Key features include:

- Warmed air input
- Intelligent Temperature Control: Automatic avoiding high temp high humidity input ventilation.
- Energy-Efficient Operation: Low running costs and continuous airflow.
- Long Life PWM DC Motor: quiet operation, and 50,000+ hours of reliability.
- Warmed Air Intake: Integrated 100-watt Far Infra Red heater.
- 2-Year Warranty: Peace of mind guarantee.

SPECIFICATIONS

WAD META WIRING

+ Autostat

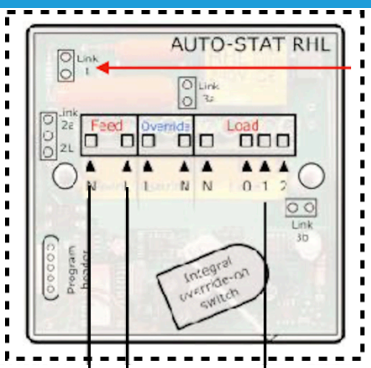

Standard

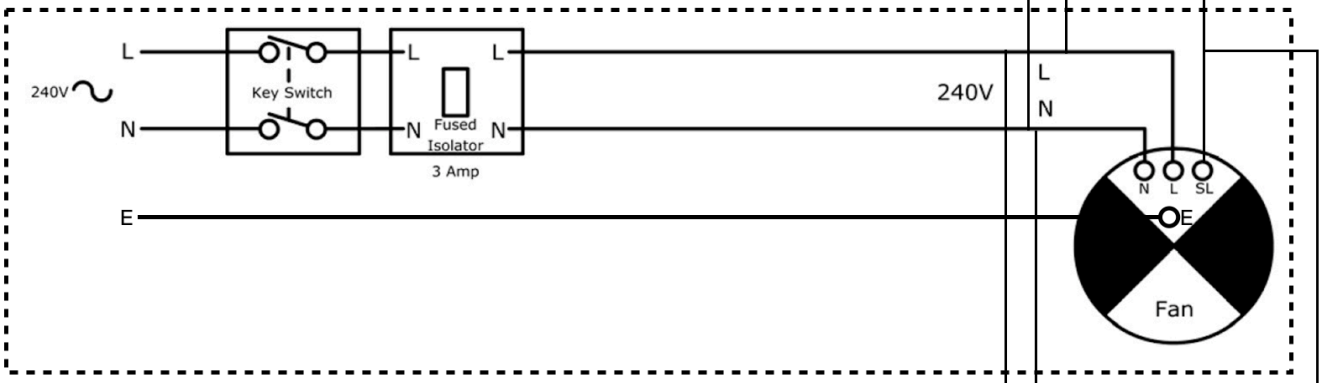

META unit connection via WAGO snap internal supplies with flying lead

+ Light Switch

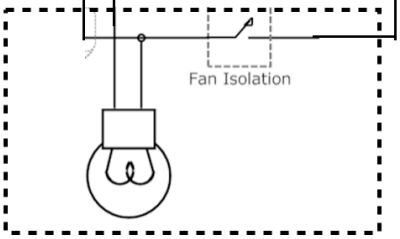

Installation
Core ø162mm hole in wall.
Fit unit into wall.
Connect flying lead as circuit above, 240v Brown Live, Blue Neutral, Black Switched live + E
Use internal WAGO connection as required.
Extend telescopic tube to wall depth.
Fit external grille, power up, operation is automatic (fit & forget).

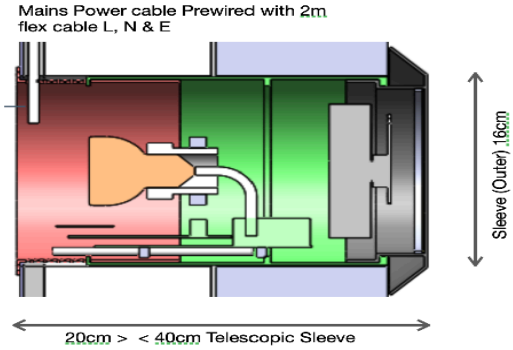

Order Code: META B PIV

Fan >10W 12V DC PWM. Heater 100W @240v a.c
Noise on Low speed, Less than 30dB
Life Expectancy: >60,000 hours
Static Pressure 75Pa
Air flow Extract 0 -125m3/h on Intake 0 - 75m3/h
System Auto Turn off < 35/40C
Heater on <14C

VapourFlow

VapourFlow Limited
Henley on Thames
RG9 1UZ
United Kingdom

01491 410170
vapourflow.com
vents@vapourflow.com